


유량조절밸브

M5, 1/8, 1/4, 3/8, 1/2

PFC□2

실린더 체결형
Meter-out type

공압기호



주문형식

PFC 2 - 06 - M5

① ② ③ ④

1. 시리즈 명 Meter out

2. 몸체 크기

1	M5
2	1/8, 1/4
3	3/8
4	1/2

3. 튜브외경

04	4 mm
06	6 mm
08	8 mm
10	10 mm
12	12 mm


4. 연결구

M5	M5
1/8	PT 1/8"
1/4	PT 1/4"
3/8	PT 3/8"
1/2	PT 1/2"

사양

최고 보증내 압력	MPa	1.2(12)
최고 사용 압력	(bar)	1.0(9.9)
사용 온도	℃	5~60℃
사용 매체		압축공기
접속 구경		M5, 1/8, 1/4, 3/8, 1/2
적용 튜브 외경	mm	φ4, φ6, φ8, φ10, φ12

외형 치수도

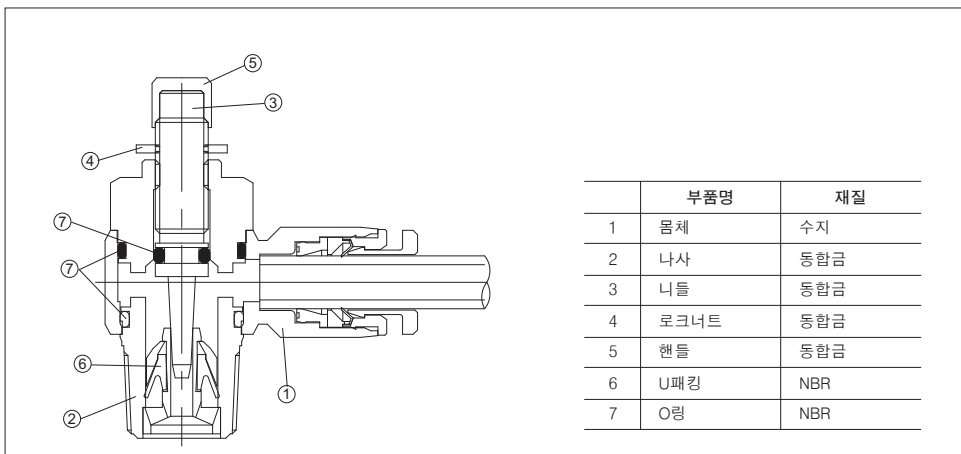


	부품명	재질
1	몸체	수지
2	나사	동합금
3	니들	동합금
4	로크너트	동합금
5	핸들	동합금
6	U패킹	NBR
7	O링	NBR

원터치 피팅형 스피드 컨트롤러

외형치수도

PFC 시리즈

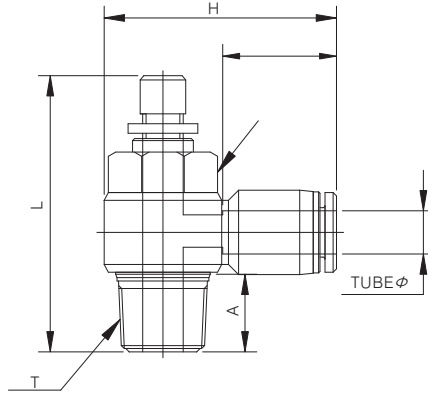

(단위 : mm)

품명	L		T	H	적용튜브 외경	F	A	육각너트 φ
	Max	Min						
PFC12-04-M5	33.7	37	M5 x 0.8P	26.6	4	16.8	4.6	08 x 9.24
PFC12-06-M5	33.7	37	M5 x 0.8P	27.2	6	17.6	4.6	08 x 9.24
PFC22-04-1/8	44.3	48.6	PT1/8	31.5	4	16.8	8	14 x 16.1
PFC22-06-1/8	44.3	48.6	PT1/8	32.4	6	17.6	8	14 x 16.1
PFC22-08-1/8	44.3	48.6	PT1/8	39.2	8	18.7	8	14 x 16.1
PFC22-04-1/4	44.3	48.6	PT1/4	34.8	4	16.8	10	17 x 19.6
PFC22-06-1/4	44.3	48.6	PT1/4	35.6	6	17.6	10	17 x 19.6
PFC22-08-1/4	44.3	48.6	PT1/4	37.7	8	18.7	10	17 x 19.6
PFC22-10-1/4	47.6	52	PT1/4	37.9	10	19.6	10	17 x 19.6
PFC22-12-1/4	47.6	52	PT1/4	39.2	12	21.9	10	17 x 19.6
PFC32-06-3/8	47.6	52	PT3/8	40.9	6	17.6	11	21 x 24.2
PFC32-08-3/8	52	57.5	PT3/8	42.7	8	18.7	11	21 x 24.2
PFC32-10-3/8	52	57.5	PT3/8	43.6	10	19.6	11	21 x 24.2
PFC32-12-3/8	52	57.5	PT3/8	45.9	12	21.9	11	21 x 24.2
PFC42-10-1/2	61.3	67.2	PT1/2	45.6	10	19.6	14	24 x 27.7
PFC42-12-1/2	61.3	67.2	PT1/2	48.3	12	21.9	14	24 x 27.7